

Portable Gas Analyzer

Gas purity is a critical life safety issue, making monitoring for potentially explosive levels essential.

SPECIFICATIONS

MEASUREMENT CHARACTERISTICS

| | |
|---------------------------|---|
| Case Purity | 70 to 100% H ₂ in air |
| Purge | 0 to 100% H ₂ in CO ₂ 0 to 100% Air in CO ₂ |
| Hydrogen Flow Rate | 100 to 700 cc/min, 500 cc nominal |
| Resolution | +/- 0.1% |
| Accuracy | +/- 0.5% F.S. on H ₂ in Air +/- 1.0% F.S. on H ₂ or Air in CO ₂ |
| Linearity | +/- 1.0% F.S. |
| Drift | <0.2%/month |

MEASUREMENT CHARACTERISTICS

| | |
|-----------------------|------------------------------|
| Power | 115 VAC, 50/60 Hz or 230 VAC |
| Output, Signal | 4-20 mA |

MECHANICAL CHARACTERISTICS

| | |
|-----------------------------|-----------------------|
| Enclosure Dimensions | Approx. 8" x 9" x 16" |
| Area Classification | None |
| Hydrogen Pressure | 100 psi maximum |
| Gas Connections | ¼-inch compression |




The PGA is a triple-range sensor/analyzer that provides a temporary means of monitoring gas purity during all phases of generator operation, including filling and purging. We've taken a proven monitoring principle — thermal conductivity — and improved upon it. The result of E/One's development work is an extremely accurate, robust, and stable analyzer that eliminates the issues of drift and need for frequent recalibration seen in other thermal conductivity systems.




FEATURES AND BENEFITS

- Increased generator efficiency and safety
- Microprocessor controlled
- General purpose design (for use in a safe area)
- Housed in durable carry case
- Self contained

OUTLINE




POWER CORD

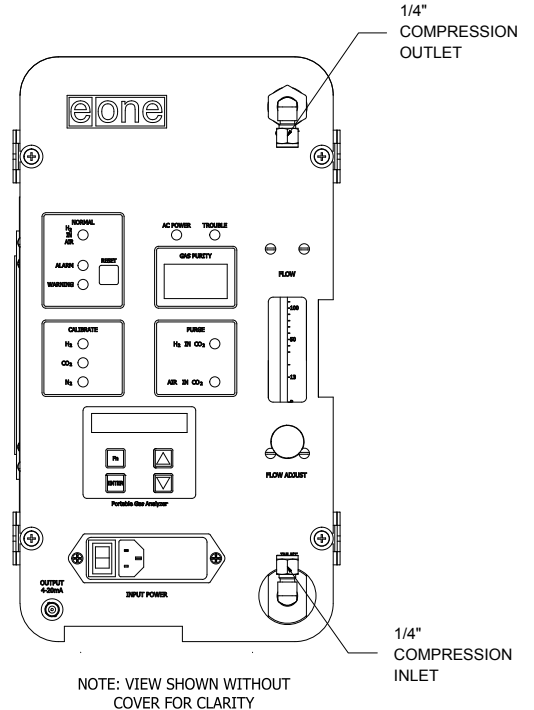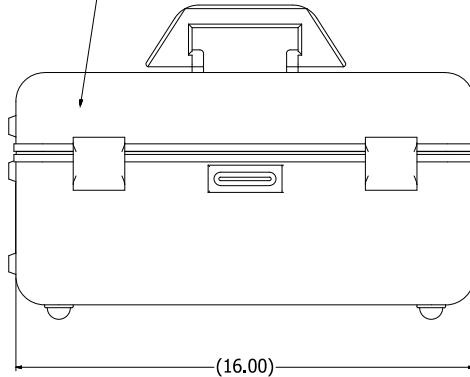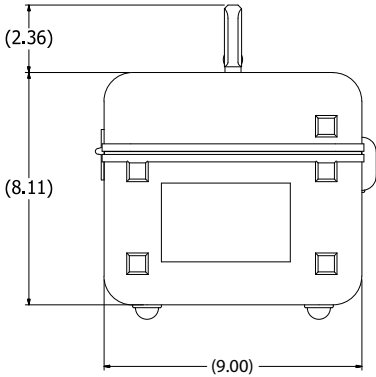

NOTE: VIEW SHOWN WITHOUT COVER FOR CLARITY

P & ID

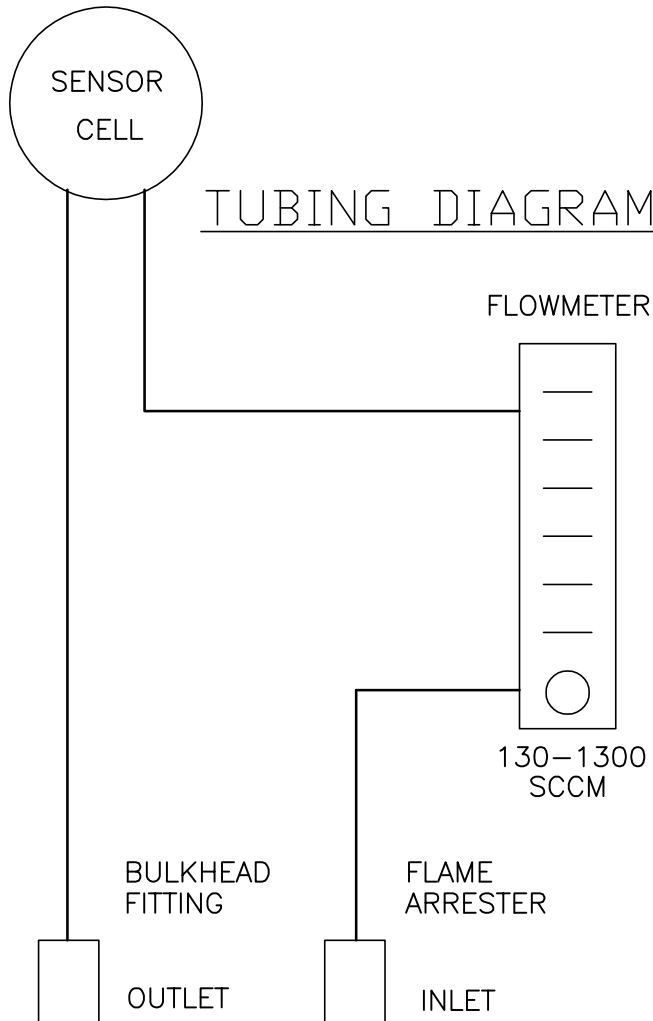

Environment One Corporation
 Utility Systems / 2773 Balltown Road / Niskayuna, NY 12309 USA
 Voice: 518.346.6161 / Fax: 518.346.4382 / www.eone.com/solutions