


Catalog Number : 9T51B0128

Features :

- Line: 120 x 240 Vac
- Load: 16/32 Vac
- Single Phase, 0.5 kVA
- 100 degree rise, Copper
- Buck Boost Application
- No Electrostatic Shield
- QB, 60Hz

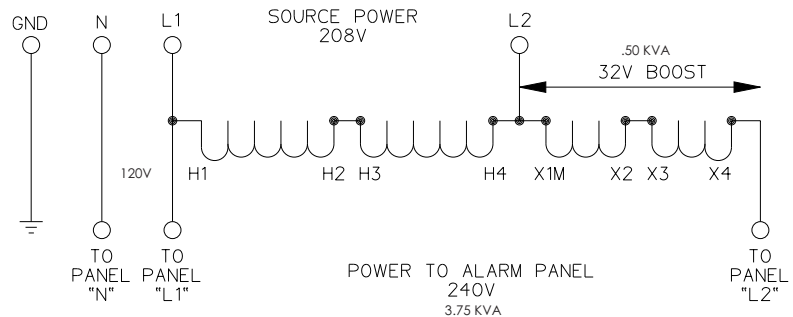

NOTE:
PANEL "L1" IS THE ALARM CIRCUIT & PUMP RED WIRE
PANEL "L2" IS THE PUMP CIRCUIT (THE BLACK WIRE)
(REFER TO THE WIRING DECAL PROVIDED ON THE DOOR OF THE PANEL)

Dimensions (inches) : 8.38H x 6.88W x 4.88D x 20lbs

Buck-Boost Transformers.

The Buck-Boost transformer is a very versatile product for which a multitude of applications exist. In its simplest form, these transformers will deliver 12, 16, 24 or 32 volts when their primaries are energized at 120 or 240 volts.

Their prime use, however, lies in the fact that the primaries and secondaries can be **interconnected**, thus permitting their use as an autotransformer. When the primaries and secondaries are connected together so that electrical characteristics are changed from a two winding transformer to those of an autotransformer, the units can economically 'buck or boost' voltage up to +/- 20%.

For use with E/One Simplex Panels

Single Phase Load: 16/32 Vac


Non-Vented (NEMA 3R)

Enclosure

Buck Boost

ORDER NUMBER:

PA0219P02

SGS	JVL	05/01/25	C	NA
DR BY	CHK'D	DATE	ISSUE	SCALE
				
TRANSFORMER, BUCK BOOST 0.50 KVA (E/ONE PT No. PA219P02)				
LM000229				